



202601 V1.0

AMS Membrane Series

CATALOGUE

Specialty Spiral Wound Elements

UNISOL MEMBRANE TECHNOLOGY

www.unisol-global.com

Contents

| | |
|-------------------------------------|----|
| Product Introduction..... | 3 |
| Product History..... | 3 |
| Project Approach..... | 3 |
| AMS Membrane Products Overview..... | 4 |
| AMS NanoPro™ Acid Element..... | 5 |
| AMS NanoPro™ Base Element..... | 8 |
| AMS NanoPro™ Solvent Element..... | 11 |
| AMS UltraPro™ Acid Element..... | 14 |
| AMS UltraPro™ Solvent Element..... | 17 |

Product Introduction

UNISOL MEMBRANE TECHNOLOGY is a membrane & membrane module supplier, providing a wide portfolio of products and seriousness in business proceedings according to customer needs.

AMS membrane series represent our chemically and thermally stable ultrafiltration (UF) and nanofiltration (NF) membranes and modules.

Today these membranes have become state of the art with significant improvement in the economics of organic and inorganic compounds recovery.

We offer a complete product line of extreme acid, alkaline, solvent, thermal- and pressure-stable membranes. Our core technology adds significant value in various applications and industries; by way of cost savings, improved recovery rates, greater supply reliability and clear environmental benefits.

AMS membrane series primarily are focused on the mineral extraction sector (mining) and industries with harsh operating environments such as: pharma, pulp, rayon, beverages and chemicals.

Product History

2000. Bio Pure Technology Ltd (BPT) is founded to develop novel NF membranes for industrial and agricultural applications.

2012. Former BPT is renamed into AMS Technologies (AMS) and belongs now to a group of investors from the mining industry.

2022. Integration of the AMS Technologies (AMS) products into the UNISOL Membrane Technology products portfolio. Today, UNISOL Membrane Technology markets products and continuously develops novel membranes to address complex tasks in various industries worldwide.

Project Approach

Initial assessment. Knowing the composition of the solution it is possible to carry out a simulation, which gives an approximate result of the separation. Clients are asked to provide details on solution's composition. This information enables UNISOL experts to provide an initial analysis.

Lab testing. After the initial analysis, it is recommended to follow up with laboratory testing. For the purpose of lab testing, UNISOL can provide the adequate testing modules or flat sheet membrane to determine feasibility

Proof of concept. Client together with UNISOL evaluates the preliminary business case of the application by analyzing potential benefits to expected costs.

Pilot plant. In collaboration with an EPC, UNISOL designs and builds a testing system at the client's site.

Full-scale plant. Lastly, an EPC will be engaged to fabricate the full-scale operating plant.

AMS Flat Sheet Membrane Overview

| Product Line | Stability | Membrane | Cut-off [Da] | pH Range | Typical Solutions |
|--------------|-----------|----------|--------------|----------|--|
| NanoPro™ | Acid | A-3011 | 100 | 0 – 12 | 20% H ₂ SO ₄ 20% HCl 4% HNO ₃ 30% H ₃ PO ₄ 15% CH ₃ COOH |
| | | A-3012 | 200 | 0 – 12 | |
| | | A-3014 | 400 | 0 – 12 | |
| | Base | B-4021 | 100 | 3 – 14 | 20% NaOH 10% KOH |
| | | B-4022 | 200 | 3 – 14 | |
| | | B-4024 | 400 | 3 – 14 | |
| | Solvent | S-3011 | 100 | 2 – 12 | Methanol, Ethanol, Propanol, Hexane, THF, Acetone, Acetonitrile, Ethyl acetate, DMF |
| | | S-3012 | 200 | 2 – 12 | |
| | | S-3014 | 400 | 2 – 12 | |
| UltraPro™ | Acid | A-U301 | 2,500 | 0 – 12 | 20% H ₂ SO ₄ 20% HCl 4% HNO ₃ 30% H ₃ PO ₄ 15% CH ₃ COOH |
| | | A-1801 | 10,000 | 0 – 12 | |
| | Solvent | S-U301 | 2,500 | 2 – 12 | Methanol, Ethanol, Propanol, Hexane, THF, Acetone, Acetonitrile, Ethyl acetate, DMF |
| | | S-1801 | 10,000 | 2 – 12 | |

AMS NanoPro™ Acid Elements

Acid Stable Nanofiltration Spiral Wound Elements

| | | | | |
|--|---|-------------------|--|--|
| Description | The AMS NanoPro™ membrane is developed for long-term performance with high and stable fluxes in very acidic environment, featuring high pressure and temperature compatibility. AMS NanoPro™ elements are used for acid purification and metals concentration in low pH streams. Typical solutions include: <ul style="list-style-type: none"> • 20% H₂SO₄ • 20% HCl • 30% H₃PO₄ • 10% CH₃COOH | | | |
| Characteristics | Membrane | Cut-off Rate (Da) | Flux ^[1] | MgSO ₄ Rejection ^[1] |
| | A-3011 | 100 | 35 LMH | 99% |
| | A-3012 | 200 | 40 LMH | 98% |
| | A-3014 | 400 | 50 LMH | 90% |
| Limits | Max Operating Pressure | | 55 bar (800 psi) | |
| | Max Pressure Drop | | 1 bar (14.5 psi) for individual element | |
| | Max. Operating Temperature | | 40 °C (104 °F) | |
| | Max. Cleaning Temperature | | 40 °C (104 °F) | |
| | Operating pH range | | 0-12 | |
| | Cleaning pH range | | 0-13 | |
| | Recirculation Flow | | 2540: 7.5 – 17 liter/min (2.0 – 4.4 gal/min) 4040: 22 – 42 liter/min (5.8 – 11.1 gal/min) 8040: 90 – 167 liter/min (23 – 42.7 gal/min) | |
| | Pressurization/ Depressurization rate | | < 0.7 bar/second (10psi/second) | |
| | Heating & cool down rate | | < 5°C /minute (41 °F/minute) | |
| Area m² (ft²) | Size | 2540 | 4040 | 8040 |
| | 31mil (B) | 1.8 (19) | 6.2 (67) | 29 (312) |
| | 46mil (C) | 1.6 (17) | 4.9 (53) | 24 (260) |

^[1] Test condition:

- a. 2000ppm MgSO₄ solution, 225psi (15.5bar), 86°F (30°C), pH7.0.
- b. Permeate flow for individual elements may vary ± 20%.


^[2] Test condition: 5% Glucose solution, 225psi (15.5bar), 86°F (30°C), pH7.0.

^[3] For the purpose of improvement, specifications may be updated periodically.

^[4] Consult UNISOL Membrane Technology when intend to operate at elevated pressure, temperature, concentrations.

^[5] Stabilized salt rejection is generally achieved within 24 – 48 hours of continuous use, depending upon feed water characteristics and operating conditions.

Dimensions

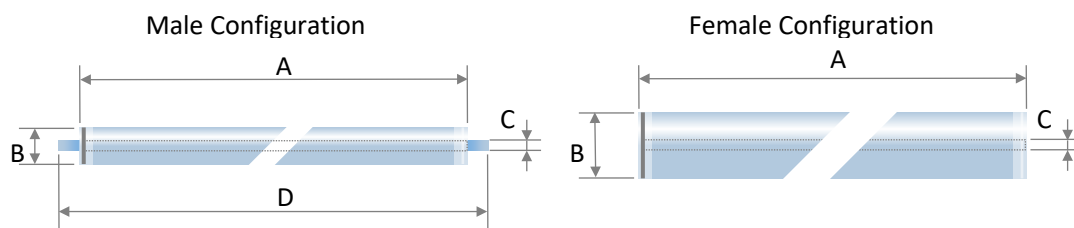

| Size mm(inch) | A ^[1] | ∅B ^[2] | ∅C ^[3] | D | Permeate tube |
|---------------|------------------|-------------------|-------------------|-----------|---------------|
| 2540 | 965 (38) | 62 (2.4) | 19 (0.748) | 1016 (40) | Male |
| 4040 | 965 (38) | 99 (3.9) | 19 (0.748) | 1016 (40) | Male |
| 8040 | 1016 (40) | 200.5 (7.9) | 28.9 (1.138) | / | Female |

^[1] Tolerance: -2~0 mm

^[2] Tolerance: -2~0 mm

^[3] 2540/4040-M tolerance: 0~+0.1mm. 8040 tolerance: -0.2~0mm

Handling

Chemical Exposure. Do not expose the membrane to chlorine or other oxidants. Sodium metabisulfite (without catalysts such as cobalt) is the preferred chemical to eliminate free chlorine or other oxidizers in the feed.

* **NB:** Please do not use tap water while testing or cleaning the module since the residual chlorine contained in the tap water could negatively affect the membrane performance.

Recommended Cleaning Materials. Depending on the nature of the feed material, a choice can be made among the following cleaning agents:

- Sodium hydroxide at pH 10 – 12, temperature ≤ 40 °C (104 °F);
- Hydrochloric acid at pH 1 – 2, temperature ≤ 40 °C (104 °F);
- Nitric acid at pH 1 – 2, temperature ≤ 40 °C (104 °F);
- Na-EDTA of 0.2 – 1.0 % w/w at pH 10.5 – 11, temperature ≤ 35 °C (91 °F);
- Anionic surfactant (e.g. sodium dodecyl sulfate) of 0.5% at pH 10.5 – 11, temperature ≤ 35 °C (91°F).

Only demineralized (RO) water must be used for cleaning. **Please flush the module by permeate after processing.** Consult UNISOL Membrane Technology regarding the use of other cleaning materials.

Lubricants. During installation, use only water or glycerin to lubricate seals. The use of petroleum or vegetable-based oils or solvents may damage the element and void any warranty.

Preservation and Storage. Plan ahead to use new membranes. The element should not be allowed to dry: store it in a sealed bag, at 4 – 30°C (39 – 86°F). Storage solutions should be made with: 1.5% w/w sodium metabisulfite. Please refer to “UNISOL Membrane Element Storage and Handling Instructions.”

Annex

Nomenclature: AMS–A-3011–8040–B

| AMS | A-3011 | 8040 | B |
|---------------------|---------------|-------------------|-----------------------------------|
| Design/Application | Membrane | Diameter & Length | Feed spacer |
| AMS | A-3011 | 2540 | B: 31mil /0.78mm (diamond) |
| AMS Membrane series | A-3012 | 4040 | C: 46mil /1.1mm (diamond) |
| | A-3014 | 8040 | M: 34mil /0.86mm (diamond) |

AMS NanoPro™ Base Elements

Base Stable Nanofiltration Spiral Wound Elements

Description The AMS NanoPro™ B-series membranes are developed for long-term performance with high and stable fluxes in a very base environment, featuring high pressure and temperature compatibility. AMS NanoPro™ B-series elements are used for alkali purification and components concentration in high-pH streams. Typical solutions include:

- 20% NaOH
- 10% KOH

| Characteristics | Membrane | Cut-off Rate (Da) | Water Flux ^[1] | MgSO ₄ Rejection ^[1] |
|-----------------|----------|-------------------|---------------------------|--|
| | | B-4021 | 100 | 35 LMH |
| | B-4022 | 200 | 40 LMH | 97.5% |
| | B-4024 | 400 | 50 LMH | 92.0% |

| Limits | Max Operating Pressure | |
|--------|---------------------------------------|--|
| | | |
| | Max Pressure Drop | |
| | | 1 bar (14.5 psi) for individual element |
| | Max. Operating Temperature | |
| | | 50 °C (104 °F) |
| | Max. Cleaning Temperature | |
| | | 50 °C (104 °F) |
| | Operating pH range | |
| | | 3-14 |
| | Cleaning pH range | |
| | | 2-14 |
| | Recirculation Flow | |
| | | 2540: 7.5 – 17 liter/min (2.0 – 4.4 gal/min) |
| | | 4040: 22 – 42 liter/min (5.8 – 11.1 gal/min) |
| | | 8040: 90 – 167 liter/min (23 – 42.7 gal/min) |
| | Pressurization/ Depressurization rate | |
| | | < 0.7 bar/second (10psi/second) |
| | Heating & cool down rate | |
| | | < 5°C /minute (41 °F/minute) |

| Area m ² (ft ²) | Size | 2540 | 4040 | 8040 |
|--|-----------|----------|----------|----------|
| | 31mil (B) | 1.6 (17) | 6.1 (66) | 28 (300) |
| | 46mil (C) | / | 4.7 (51) | 23 (250) |

^[1] Test condition:

- a. 2000ppm MgSO₄ solution, 225psi (15.5bar), 86°F (30°C), pH7.0;
- b. Permeate flow for individual elements may vary ± 20%;


^[2] Test condition: 5% Glucose solution, 225psi (15.5bar), 86°F (30°C), pH7.0;

^[3] For the purpose of improvement, specifications may be updated periodically

^[4] Consult UNISOL Membrane Technology when intend to operate at elevated pressure, temperature, concentrations.

^[5] Stabilized salt rejection is generally achieved within 24 – 48 hours of continuous use, depending upon feed water characteristics and operating conditions.

Dimensions

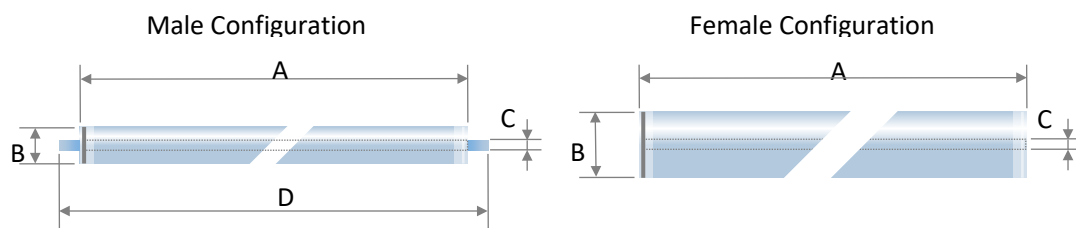

| Size mm(inch) | A ^[1] | øB ^[2] | øC ^[3] | D | Permeate tube |
|---------------|------------------|-------------------|-------------------|-----------|---------------|
| 2540 | 965 (38) | 62 (2.4) | 19 (0.748) | 1016 (40) | Male |
| 4040 | 965 (38) | 99 (3.9) | 19 (0.748) | 1016 (40) | Male |
| 8040 | 1016 (40) | 200.5 (7.9) | 28.9 (1.138) | / | Female |

^[1] Tolerance: -2~0 mm

^[2] Tolerance: -2~0 mm

^[3] 2540/4040-M tolerance: 0~+0.1mm. 8040 tolerance: -0.2~0mm.

Handling

Chemical Exposure. Do not expose the membrane to chlorine or other oxidants. Sodium metabisulfite (without catalysts such as cobalt) is the preferred chemical to eliminate free chlorine or other oxidizers in the feed.

* **NB:** Please do not use tap water while testing or cleaning the module since the residue chlorine contained in the tap water could negatively affect the membrane performance.

Recommended Cleaning Materials. Depending on the nature of the feed material, a choice can be made among the following cleaning agents:

- Sodium hydroxide at pH 10 – 12, temperature ≤ 40 °C (104°F);
- Hydrochloric acid at pH 1 – 2, temperature ≤ 40 °C (104°F);
- Nitric acid at pH 1 – 2, temperature ≤ 40 °C (104°F);
- Na-EDTA of 0.2 – 1.0 % w/w at pH 10.5 – 11, temperature ≤ 35 °C (91°F);
- Anionic surfactant (e.g. sodium dodecyl sulfate) of 0.5 % at pH 10.5 – 11, temperature ≤ 35 °C (91 °F).

Only demineralized (RO) water must be used for cleaning. **Please flush the module by permeate after processing.** Consult UNISOL Membrane Technology regarding the use of other cleaning materials.

Lubricants. During installation, use only water or glycerin to lubricate seals. The use of petroleum or vegetable-based oils or solvents may damage the element and void any warranty.

Preservation and Storage. Plan ahead to use new membranes. The element should not be allowed to dry: store it in a sealed bag, at 4 – 30°C (39 – 86°F). Storage solutions should be made with: 1.5 % w/w sodium metabisulfite. Please refer to “UNISOL Membrane Element Storage and Handling Instructions.”

Annex

Nomenclature: AMS–B-4021–8040–B

| AMS | B-4021 | 8040 | B |
|---------------------|---------------|-------------------|-----------------------------------|
| Design/Application | Membrane | Diameter & Length | Feed spacer |
| AMS | B-4021 | 2540 | B: 31mil /0.78mm (diamond) |
| AMS Membrane series | B-4022 | 4040 | C: 46mil /1.1mm (diamond) |
| | B-4024 | 8040 | M: 34mil /0.86mm (diamond) |

AMS NanoPro™ Solvent Elements

Solvent Stable Nanofiltration Spiral Wound Elements

| | | | | | |
|--|--|-------------------|---|--|--|
| Description | The AMS NanoPro™ membrane is developed for long-term performance with high and stable fluxes in presence of solvents, featuring high pressure and temperature compatibility. The hydrophilic NanoPro™ S Series solvent-resistant membranes are suitable for non-pure solvent solutions. They are used for the purification and concentration of components in solvent-water solutions. Typical solvents include: | | | | |
| | <ul style="list-style-type: none"> • Methanol, Ethanol, Propanol • Acetone, Acetonitrile | | <ul style="list-style-type: none"> • Hexane • Ethyl acetate | | <ul style="list-style-type: none"> • THF • DMF |
| Characteristics | Membrane | Cut-off Rate (Da) | Water Flux | MgSO ₄ Rejection ^[1] | Glucose Rejection ^[2] |
| | S-3011 | 100 | 22 LMH | 98% | 98% |
| | S-3012 | 200 | 25 LMH | 96% | 96% |
| | S-3014 | 400 | 30 LMH | 90% | 90% |
| Limits | Max Operating Pressure | | 40 bar (580 psi) | | |
| | Max Pressure Drop | | 1 bar (14.5 psi) for individual element | | |
| | Max. Operating Temperature | | 40 °C (104 °F) | | |
| | Max. Cleaning Temperature | | 40 °C (104 °F) | | |
| | Operating pH range | | 2 – 12 | | |
| | Cleaning pH range | | 1 – 13 | | |
| | Recirculation Flow | | 1812: 4.0 – 8.0 liter/min (1.0 – 2.1 gal/min) | | |
| | | | 2540: 7.5 – 17 liter/min (2.0 – 4.4 gal/min) | | |
| | | | 4040: 22 – 42 liter/min (5.8 – 11.1 gal/min) | | |
| | | | 8040: 90 – 167 liter/min (23 – 42.7 gal/min) | | |
| | Pressurization/ Depressurization rate | | < 0.7 bar/second (10psi/second) | | |
| | Heating & cool down rate | | < 5°C /minute (41 °F/minute) | | |
| Area m² (ft²) | Size | 1812 | 2540 | 4040 | 8040 |
| | 31mil (B) | 0.19 (2) | 1.8 (19) | 6.2 (67) | 29 (312) |
| | 46mil (C) | 0.17 (1.8) | 1.6 (17) | 4.9 (53) | 24 (260) |

^[1] Test condition:

a. 2000ppm MgSO₄ solution, 225psi (15.5bar), 86°F (30°C), pH 7.0.

b. Permeate flow for individual elements may vary ± 20%.


^[2] Test condition: 5% Glucose solution, 225psi (15.5bar), 86°F (30°C), pH 7.0.

^[3] For the purpose of improvement, specifications may be updated periodically.

^[4] Consult UNISOL Membrane Technology when intend to operate at elevated pressure, temperature, concentrations.

^[5] Stabilized salt rejection is generally achieved within 24 – 48 hours of continuous use, depending upon feed water characteristics and operating conditions.

Dimensions

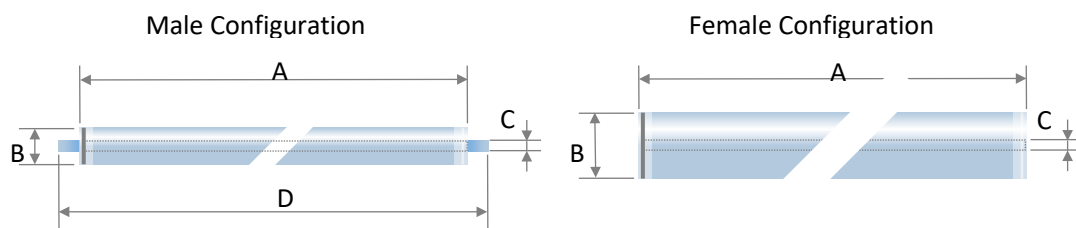

| Size mm(inch) | A ^[1] | ∅B ^[2] | ∅C ^[3] | D | Permeate tube |
|---------------|------------------|-------------------|-------------------|-----------|---------------|
| 1812 | 305 (12) | 46 (1.8) | 16 (0.629) | / | Female |
| 2540 | 956 (37.6) | 62 (2.4) | 19 (0.748) | 1016 (40) | Male |
| 4040 | 965 (38) | 99 (3.9) | 19 (0.748) | 1016 (40) | Male |
| 8040 | 1016 (40) | 200.5 (7.9) | 28.9 (1.138) | / | Female |

^[1] Tolerance: -2~0 mm

^[2] Tolerance: -2~0 mm

^[3] 1812 tolerance: ±0.1 mm. 2540/4040-M tolerance: 0~+0.1mm. 8040 tolerance: -0.2~0mm

Handling

Chemical Exposure. Do not expose the membrane to chlorine or other oxidants. Sodium metabisulfite (without catalysts such as cobalt) is the preferred chemical to eliminate free chlorine or other oxidizers in the feed.

* **NB:** Please do not use tap water while testing or cleaning the module since the residual chlorine contained in the tap water could negatively affect the membrane performance.

Recommended Cleaning Materials. Depending on the nature of the feed material, a choice can be made among the following cleaning agents:

- Sodium hydroxide at pH 10 – 12, temperature ≤ 40 °C (104 °F);
- Hydrochloric acid at pH 1 – 2, temperature ≤ 40 °C (104 °F);
- Nitric acid at pH 1 – 2, temperature ≤ 40 °C (104 °F);
- Na-EDTA of 0.2 – 1.0 % w/w at pH 10.5 – 11, temperature ≤ 35 °C (91 °F);
- Anionic surfactant (e.g. sodium dodecyl sulfate) of 0.5 % at pH 10.5 – 11, temperature ≤ 35 °C (91 °F).

Only demineralized (RO) water must be used for cleaning. **Please flush the module by permeate after processing.** Consult UNISOL Membrane Technology regarding the use of other cleaning materials.

Lubricants. During installation, use only water or glycerin to lubricate seals. The use of petroleum or vegetable-based oils or solvents may damage the element and void any warranty.

Preservation and Storage. Plan ahead to use new membranes. The element should not be allowed to dry: store it in a sealed bag, at 4 – 30 °C (39 – 86 °F). Storage solutions should be made with: 1.5 % w/w sodium metabisulfite. Please refer to “UNISOL Membrane Element Storage and Handling Instructions.”

Annex

Nomenclature: AMS–S-3011–8040–B

| AMS | S-3011 | 8040 | B |
|---------------------|---------------|-------------------|-----------------------------------|
| Design/Application | Membrane | Diameter & Length | Feed spacer |
| AMS | S-3011 | 1812 | B: 31mil /0.78mm (diamond) |
| AMS Membrane series | S-3012 | 2540 | C: 46mil /1.1mm (diamond) |
| | S-3014 | 4040 | M: 34mil /0.86mm (diamond) |
| | | 8040 | |

AMS UltraPro™ Acid Elements

Acid Stable Ultrafiltration Spiral Wound Elements

Description The AMS UltraPro™ membrane is developed for long-term performance with high and stable fluxes in very acidic environment, featuring high pressure and temperature compatibility. AMS UltraPro™ elements are used for either pre-filtration before nanofiltration or as stand-alone membranes in acid purification and metals concentration.

Typical solutions include:

- 20% H₂SO₄
- 20% HCl
- 30% H₃PO₄
- 10% CH₃COOH

| Characteristics | Membrane | Cut-off Rate (Da) | Water Flux |
|-----------------|-----------------------|-------------------|--------------------------|
| | A-1801 ^[1] | 10000 | 18LMH/bar ^[1] |
| | A-U301 ^[2] | 2500 | 60LMH ^[2] |

| Limits | | |
|--------|---------------------------------------|---|
| | Max Operating Pressure | 25 bar (360 psi) |
| | Max Pressure Drop | 1 bar (14.5 psi) for individual element |
| | Max. Operating Temperature | 40 °C (122 °F) |
| | Max. Cleaning Temperature | 40 °C (122 °F) |
| | Operating pH range | 0-12 |
| | Cleaning pH range | 0-13 |
| | Recirculation Flow | 1812: 4.0 – 8.0 liter/min (1.0 – 2.1 gal/min) 2540: 7.5 – 17 liter/min (2.0 – 4.4 gal/min) 4040: 22 – 42 liter/min (5.8 – 11.1 gal/min) 8040: 90 – 167 liter/min (23 – 42.7 gal/min) |
| | Pressurization/ Depressurization rate | < 0.7 bar/second (10psi/second) |
| | Heating & cool down rate | < 5°C /minute (41 °F/minute) |

| Area m ² (ft ²) | Size | 1812 | 2540 | 4040 | 8040 |
|--|-----------|------------|----------|----------|----------|
| | 31mil (B) | 0.19 (2) | 1.8 (19) | 6.2 (67) | 29 (312) |
| | 46mil (C) | 0.17 (1.8) | 1.6 (17) | 4.9 (53) | 24 (260) |

^[1] Test condition: RO water, 27psi (2bar), 86°F (30°C), pH 7.0.

Permeate flow for individual elements may vary ± 20%


^[2] Test condition: RO water, 225psi (15.5bar), 86°F (30°C), pH 7.0.

^[3] For the purpose of improvement, specifications may be updated periodically.

^[4] Consult UNISOL Membrane Technology when intend to operate at elevated pressure, temperature, concentrations.

^[5] Stabilized salt rejection is generally achieved within 24 – 48 hours of continuous use, depending upon feed water characteristics and operating conditions.

Dimensions

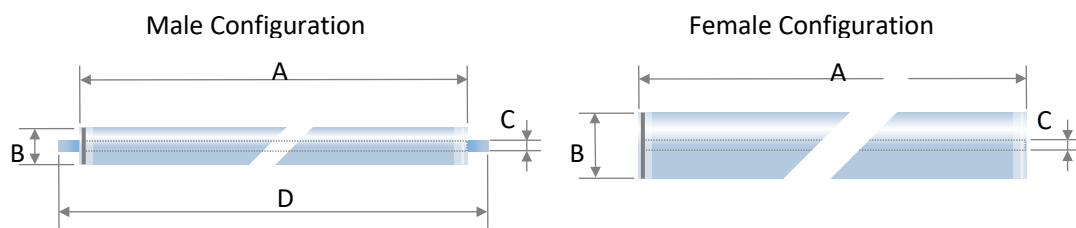

| Size mm(inch) | A ^[1] | ∅B ^[2] | ∅C ^[3] | D | Permeate tube |
|---------------|------------------|-------------------|-------------------|-----------|---------------|
| 1812 | 305 (12) | 46 (1.8) | 16 (0.629) | / | Female |
| 2540 | 965 (38) | 62 (2.4) | 19 (0.748) | 1016 (40) | Male |
| 4040 | 965 (38) | 99 (3.9) | 19 (0.748) | 1016 (40) | Male |
| 8040 | 1016 (40) | 200.5 (7.9) | 28.9 (1.138) | / | Female |

^[1] Tolerance: -2~0 mm

^[2] Tolerance: -2~0 mm

^[3] 1812 tolerance: ±0.1 mm. 2540/4040-M tolerance: 0~+0.1mm. 8040 tolerance: -0.2~0mm

Handling

Chemical Exposure. Do not expose the membrane to chlorine or other oxidants. Sodium metabisulfite (without catalysts such as cobalt) is the preferred chemical to eliminate free chlorine or other oxidizers in the feed.

* **NB:** Please do not use tap water while testing or cleaning the module since the residual chlorine contained in the tap water could negatively affect the membrane performance.

Recommended Cleaning Materials. Depending on the nature of the feed material, a choice can be made among the following cleaning agents:

- Sodium hydroxide at pH 10 – 12, temperature ≤40 °C (104 °F);
- Hydrochloric acid at pH 1 – 2, temperature ≤40 °C (104 °F);
- Nitric acid at pH 1 – 2, temperature ≤40 °C (104 °F);
- Na-EDTA of 0.2 – 1.0 % w/w at pH 10.5 – 11, temperature ≤35 °C (91 °F);
- Anionic surfactant (e.g. sodium dodecyl sulfate) of 0.5 % at pH 10.5 – 11, temperature ≤35 °C (91 °F).

Only demineralized (RO) water must be used for cleaning. **Please flush the module by permeate after processing.** Consult UNISOL Membrane Technology regarding the use of other cleaning materials.

Lubricants. During installation, use only water or glycerin to lubricate seals. The use of petroleum or vegetable-based oils or solvents may damage the element and void any warranty.

Preservation and Storage. Plan ahead to use new membranes. The element should not be allowed to dry: store it in a sealed bag, at 4 – 30 °C (39 – 86 °F). Storage solutions should be made with: 1.5 % w/w sodium metabisulfite. Please refer to “UNISOL Membrane Element Storage and Handling Instructions.”

Annex

Nomenclature: AMS–A-U301–8040–B

| AMS | A-U301 | 8040 | B |
|---------------------|---------------|-------------------|-----------------------------------|
| Design/Application | Membrane | Diameter & Length | Feed spacer |
| AMS | A-U301 | 1812 | B: 31mil /0.78mm (diamond) |
| AMS Membrane series | A-1801 | 2540 | C: 46mil /1.1mm (diamond) |
| | | 4040 | M: 34mil /0.86mm (diamond) |
| | | 8040 | |

AMS UltraPro™ Solvent Elements

Solvent Stable Ultrafiltration Spiral Wound Elements

| | | | |
|--------------------|--|---|--|
| Description | The AMS UltraPro™ membrane is developed for long-term performance with high and stable fluxes in presence of solvents, featuring high pressure and temperature compatibility. AMS UltraPro™ elements are used for either pre-filtration before nanofiltration or as stand-alone membranes in solvent purification and component concentration. The hydrophilic UltraPro™ S Series solvent-resistant membranes are suitable for non-pure solvent solutions. They are used for the purification and concentration of components in solvent-water solutions. Typical solvents include*: | | |
| | <ul style="list-style-type: none"> • Methanol, Ethanol, Propanol • Acetone, Acetonitrile | <ul style="list-style-type: none"> • Hexane • Ethyl acetate | <ul style="list-style-type: none"> • THF • DMF |

| Characteristics | Membrane | Cut-off Rate (Da) | Water Flux |
|------------------------|-----------------------|-------------------|--------------------------|
| | S-1801 ^[1] | 10000 | 18LMH/bar ^[1] |
| | S-U301 ^[2] | 2500 | 60LMH ^[2] |

| | | |
|---------------|---------------------------------------|---|
| Limits | Max Operating Pressure | 25 bar (360 psi) |
| | Max Pressure Drop | 1 bar (14.5 psi) for individual element |
| | Max. Operating Temperature | 40 °C (122 °F) |
| | Max. Cleaning Temperature | 40 °C (122 °F) |
| | Operating pH range | 2-12 |
| | Cleaning pH range | 1-13 |
| | Recirculation Flow | 1812: 4.0 – 8.0 liter/min (1.0 – 2.1 gal/min) 2540: 7.5 – 17 liter/min (2.0 – 4.4 gal/min) 4040: 22 – 42 liter/min (5.8 – 11.1 gal/min) 8040: 90 – 167 liter/min (23 – 42.7 gal/min) |
| | Pressurization/ Depressurization rate | < 0.7 bar/second (10psi/second) |
| | Heating & cool down rate | < 5°C /minute (41 °F/minute) |

| Area m² (ft²) | Size | 1812 | 2540 | 4040 | 8040 |
|--|-----------|------------|----------|----------|----------|
| | 31mil (B) | 0.19 (2) | 1.8 (19) | 6.2 (67) | 29 (312) |
| | 46mil (C) | 0.17 (1.8) | 1.6 (17) | 4.9 (53) | 24 (260) |

^[1] Test condition: RO water, 27psi (2bar), 86°F (30°C), pH 7.0.

Permeate flow for individual elements may vary ± 20%.


^[2] Test condition: RO water, 225psi (15.5bar), 86°F (30°C), pH 7.0.

^[3] For the purpose of improvement, specifications may be updated periodically.

^[4] Consult UNISOL Membrane Technology when intend to operate at elevated pressure, temperature, concentrations.

^[5] Stabilized salt rejection is generally achieved within 24 – 48 hours of continuous use, depending upon feed water characteristics and operating conditions.

Dimensions

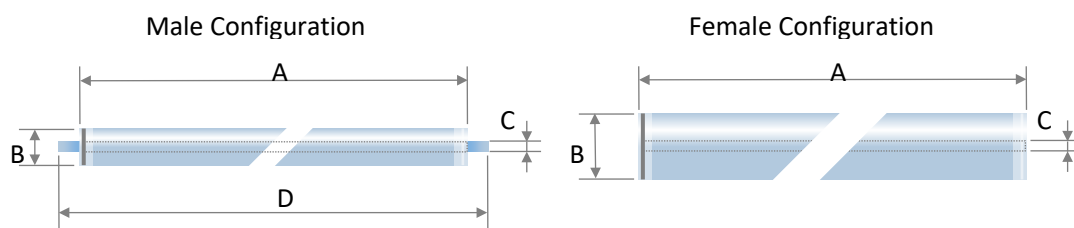

| Size mm(inch) | A ^[1] | øB ^[2] | øC ^[3] | D | Permeate tube |
|---------------|------------------|-------------------|-------------------|-----------|---------------|
| 1812 | 305 (12) | 46 (1.8) | 16 (0.629) | / | Female |
| 2540 | 956 (37.6) | 62 (2.4) | 19 (0.748) | 1016 (40) | Male |
| 4040 | 965 (38) | 99 (3.9) | 19 (0.748) | 1016 (40) | Male |
| 8040 | 1016 (40) | 200.5 (7.9) | 28.9 (1.138) | / | Female |

^[1] Tolerance: -2~0 mm

^[2] Tolerance: -2~0 mm

^[3] 1812 tolerance: ±0.1 mm. 2540/4040-M tolerance: 0~+0.1mm. 8040 tolerance: -0.2~0mm

Handling

Chemical Exposure. Do not expose the membrane to chlorine or other oxidants. Sodium metabisulfite (without catalysts such as cobalt) is the preferred chemical to eliminate free chlorine or other oxidizers in the feed.

* **NB:** Please do not use tap water while testing or cleaning the module since the residue chlorine contained in the tap water could negatively affect the membrane performance.

Recommended Cleaning Materials. Depending on the nature of the feed material, a choice can be made among the following cleaning agents:

- Sodium hydroxide at pH 10 – 12, temperature ≤40 °C (104 °F);
- Hydrochloric acid at pH 1 – 2, temperature ≤40 °C (104 °F);
- Nitric acid at pH 1 – 2, temperature ≤40 °C (104 °F);
- Na-EDTA of 0.2 – 1.0 % w/w at pH 10.5 – 11, temperature ≤35 °C (91 °F);
- Anionic surfactant (e.g. sodium dodecyl sulfate) of 0.5 % at pH 10.5 – 11, temperature ≤35 °C (91 °F).

Only demineralized (RO) water must be used for cleaning. **Please flush the module by permeate after processing.** Consult UNISOL Membrane Technology regarding the use of other cleaning materials.

Lubricants. During installation, use only water or glycerin to lubricate seals. The use of petroleum or vegetable-based oils or solvents may damage the element and void any warranty.

Preservation and Storage. Plan ahead to use new membranes. The element should not be allowed to dry: store it in a sealed bag, at 4 – 30 °C (39 – 86 °F). Storage solutions should be made with: 1.5 % w/w sodium metabisulfite. Please refer to “UNISOL Membrane Element Storage and Handling Instructions.”

Annex

Nomenclature: AMS–S-U301–8040–B

| AMS | S-U301 | 8040 | B |
|---------------------|---------------|-------------------|-----------------------------------|
| Design/Application | Membrane | Diameter & Length | Feed spacer |
| AMS | S-U301 | 1812 | B: 31mil /0.78mm (diamond) |
| AMS Membrane series | S-1801 | 2540 | C: 46mil /1.1mm (diamond) |
| | | 4040 | M: 34mil /0.86mm (diamond) |
| | | 8040 | |



China

UNISOL Membrane Technology (Xiamen) Co., Ltd.
#1670, Butang Mid Rd, Tong'an District, Xiamen
361112, China
+86 592 6301318
infochina@unisol-global.com

Germany

WTA UNISOL GmbH
Fritz-Bothmann-Str. 1, 99867 Gotha, Germany
+49 (0) 3621 73 77 920
info@wta-unisol.com
www.wta-unisol.com

USA

UNISOL LLC
108 W.13th street suite 100,
WILMINGTON, Delaware 19801, USA
+1 310 334 9707
infousa@unisol-global.com

India

+91 98330 90670
Mumbai, India
infoindia@unisol-global.com

Vietnam

+84 983 537 155
198 N7 Street, Dong Tang Long, Long Phuoc
ward, Ho Chi Minh city, Vietnam
infovn@unisol-global.com

UNISOL MEMBRANE TECHNOLOGY reserves the right to change specifications without prior notification.
For the latest version, please refer to the internet.
www.unisol-global.com | info@unisol-global.com